



# THINKING ELECTRONIC INDUSTRIAL CO., LTD.

HEAD OFFICE: 8F-1, No.93, Ta-Shun 1st Rd., Kaohsiung, Taiwan

TEL: 886-7-5577660 FAX: 886-7-5570560

## MANUFACTURING SITE

KAOHSIUNG FACTORY: No.51, Kaifa Road, Nantze Export Processing Zone, Kaohsiung City 81170, Taiwan  
TEL: 886-7-9616668 FAX: 886-7-9616698

CHANGZHOU FACTORY: No.82,Renmin Mid Rd.,WuJin High&New-Tech Industrial Development Zone,ChangZhou,JiangSu,China  
TEL:86-519-86578999 FAX:86-519-86558643

DONG GUAN FACTORY: Chiao-Tou Tsun, Sha-Tao Hsiang, Chang-An Town, Dong-Guan City 523863, Guangdong, China  
TEL:86-769-85542016 FAX:86-769-85546890

YICHANG FACTORY: No. 283 Xiaoting Avenue, Xiaoting Dist., Yichang City 443007, Hubei, China  
TEL:86-717-6510010 FAX:86-717-6511430



## SPECIFICATION FOR APPROVAL

CUSTOMER	Codico
CERTIFIED MODEL/TYPE	SCK-053
PART NO.	SCK08053LSY(RoHS+HF)
APPLICATION	
CUSTOMER P/N	
ISSUE DATE	Mar.14,2016
REV. NO.	
REV. DATE	

<b>FOR CUSTOMER APPROVAL</b>	<b>CHECKED BY</b>
	<i>Feng Jing</i>
	<b>APPROVED BY</b>
	<i>Huairfang Zhang</i>





NTC Thermistor SCK Type

Part No.:SCK08053LSY

## REVISED RECORD SHEET

REV. NO	REV. DATE	REVISED CONTENT



## INDEX

## Page

■ Part Number Code	1
■ Structure and Dimensions	2
■ Electrical Characteristics	2
■ Reliability	3
■ Soldering Recommendation	4
■ Max. Current Derating Curve	5
■ RoHS Compliant Declaration	5
■ Warehouse Storage Conditions of Products	5
■ Safety Approvals & Certificates & Test Report	6
■ R-T Characteristic Curve	7
■ V-I Characteristic Curve	8


Part Number Code

Example :

**SCK**   **08**   **05**   **3**   **L**   **S**   **Y**  
(1)   (2)   (3)   (4)   (5)   (6)   (7)

No.	Item	Digit	Specification
(1)	Product Type	SCK	Thinking NTC thermistor SCK type
(2)	Body Size	08	$\phi$ 8 mm
(3)	Zero Power Resistance at 25°C (R <sub>25</sub> )	05	5Ω
(4)	Max. Current at 25°C	3	I <sub>max</sub> =3A
(5)	Tolerance of R <sub>25</sub>	L	± 15%
(6)	Appearance	S	Straight lead
(7)	Optional Suffix	Y	RoHS+HF compliance

### Structure and Dimensions

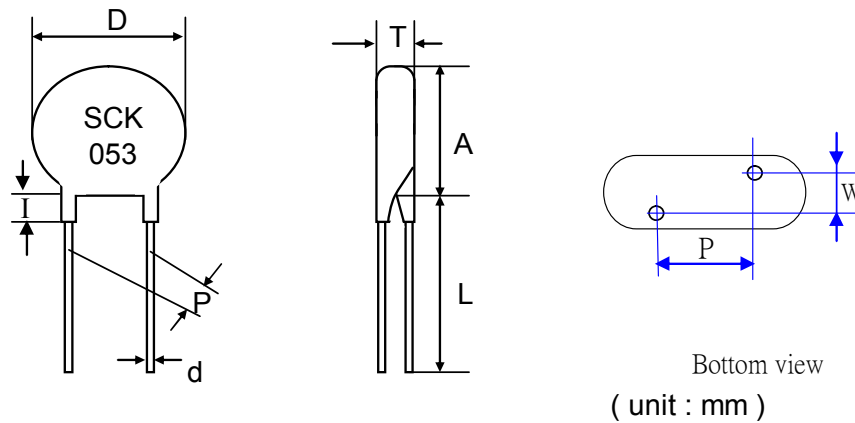

Body Size	D max.	P	d	A max.	L min.	T max.	I max.	W
φ 8mm	9.5	5.0±0.5	0.8±0.02	9.5	31	5	3	2.1±0.3

### Electrical Characteristics

Part No.	Zero Power Resistance at 25°C	Tolerance of R <sub>25</sub>	Max. Current at 25°C	Residual Resistance at 25°C I <sub>max</sub>	Max. Power Rating at 25°C
	R <sub>25</sub> (Ω)	(± %)	I <sub>max</sub> (A)	R <sub>I<sub>max</sub></sub> (Ω)	P <sub>max</sub> (W)
SCK08053LSY	5	15	3	0.261	2.3

Part No.	Dissipation Factor	Thermal Time Constant	Capacitance at 240Vac	Operating Temperature Range
	δ (mW/°C)	τ (sec.)	(μF)	T <sub>L</sub> ~T <sub>U</sub> (°C)
SCK08053LSY	Approx. 16	Approx. 38	220	-40 ~+170

Note: Due to the mechanical force, which is acted on the wire lead, the coating may have cracks and chips. However, it does not affect the performance and reliability of the component.


**Reliability**

Item	Standard	Test conditions / Methods	Specifications															
Tensile Strength of Terminals	IEC60068-2-21	Gradually applying the force specified and keeping the unit fixed for 10±1 sec.  <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">Terminal diameter (mm)</td> <td style="text-align: center;">Force (Kg)</td> </tr> <tr> <td style="text-align: center;">0.5&lt;d≤0.8</td> <td style="text-align: center;">1.0</td> </tr> <tr> <td style="text-align: center;">0.8&lt;d≤1.25</td> <td style="text-align: center;">2.0</td> </tr> </table>	Terminal diameter (mm)	Force (Kg)	0.5<d≤0.8	1.0	0.8<d≤1.25	2.0	$ \Delta R_{25}/R_{25}  \leq 10\%$									
Terminal diameter (mm)	Force (Kg)																	
0.5<d≤0.8	1.0																	
0.8<d≤1.25	2.0																	
Solderability	IEC60068-2-20	245 ± 3 °C , 3 ± 0.3 sec	At least 95% of terminal electrode is covered by new solder															
Resistance to Soldering Heat	IEC60068-2-20	260 ± 3 °C , 10 ± 1 sec	No visible damage $ \Delta R_{25}/R_{25}  \leq 10\%$															
High Temperature Storage	IEC60068-2-2	T <sub>u</sub> ± 5 °C , 1000 ± 24 hrs	No visible damage $ \Delta R_{25}/R_{25}  \leq 20\%$															
Damp Heat, Steady State	IEC 60068-2-78	40 ± 2°C , 90 ~ 95 % RH , 1000 ± 24 hrs	No visible damage $ \Delta R_{25}/R_{25}  \leq 20\%$															
Rapid Change of Temperature	IEC60068-2-14	The conditions shown below shall be repeated 5 cycles <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Period (minutes)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">T<sub>L</sub> ± 5</td> <td style="text-align: center;">30 ± 3</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">Room temperature</td> <td style="text-align: center;">5 ± 3</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">T<sub>u</sub> ± 5</td> <td style="text-align: center;">30 ± 3</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">Room temperature</td> <td style="text-align: center;">5 ± 3</td> </tr> </tbody> </table>	Step	Temperature (°C)	Period (minutes)	1	T <sub>L</sub> ± 5	30 ± 3	2	Room temperature	5 ± 3	3	T <sub>u</sub> ± 5	30 ± 3	4	Room temperature	5 ± 3	No visible damage $ \Delta R_{25}/R_{25}  \leq 20\%$
Step	Temperature (°C)	Period (minutes)																
1	T <sub>L</sub> ± 5	30 ± 3																
2	Room temperature	5 ± 3																
3	T <sub>u</sub> ± 5	30 ± 3																
4	Room temperature	5 ± 3																
Max. Current	IEC60539-1 4.26.1	25 ± 5 °C , I <sub>max.</sub> , 1000 ± 24 hrs	No visible damage $ \Delta R_{25}/R_{25}  \leq 20\%$															
Endurance	Specification Standard	25±5°C, I <sub>max.</sub> , C <sub>T</sub> , 1min ON / 5 min OFF x1000 cycles C <sub>T</sub> =Capacitance at 240Vac	No visible damage $ \Delta R_{25}/R_{25}  \leq 20\%$															
Insulation	MIL-STD-202F-Method 302	1000 V <sub>DC</sub> 1 min	No visible damage ≥ 500 MΩ															

Products have been tested at Thinking Electronic Industrial Co., Ltd. Laboratory recognized by UL (Underwriters Laboratories Inc.) under CTD (Client Test Data Program).

## Soldering Recommendation

### Wave Soldering Profile

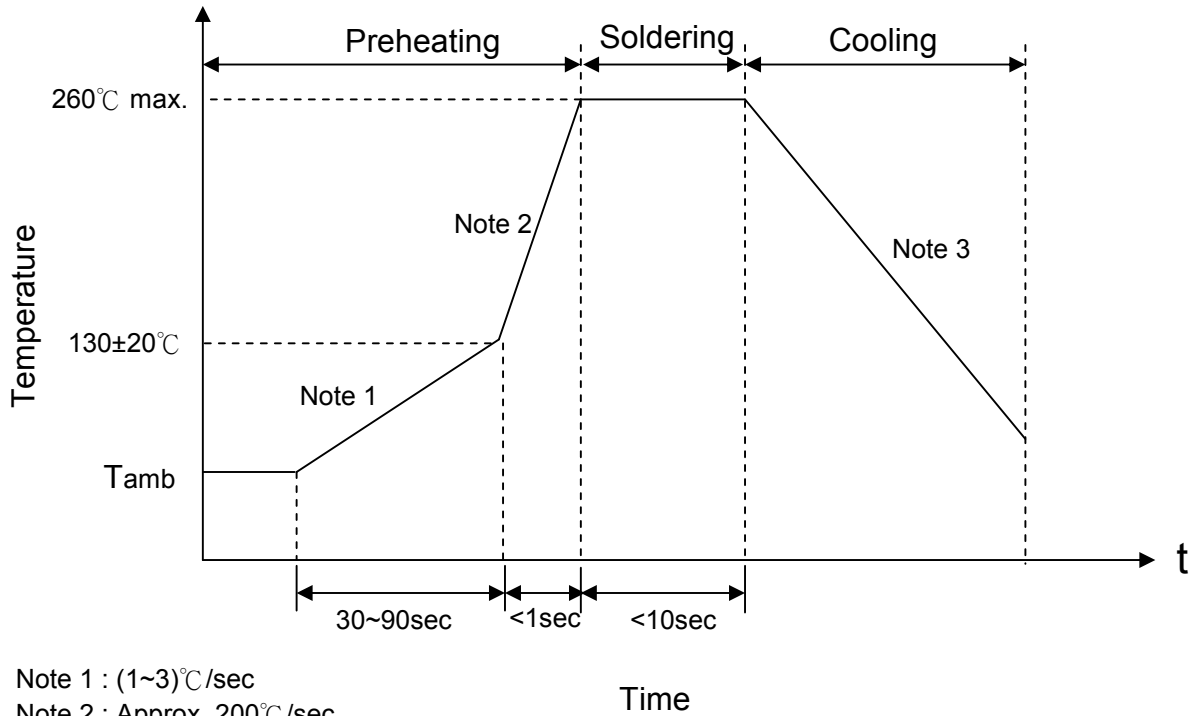

Note 1 : (1~3) $^{\circ}\text{C}/\text{sec}$


Note 2 : Approx.  $200^{\circ}\text{C}/\text{sec}$

Note 3 :  $5^{\circ}\text{C}/\text{sec max}$

### Recommended Reworking Conditions with Soldering Iron

Item	Conditions
Temperature of Soldering Iron-tip	$360^{\circ}\text{C}$ (max.)
Soldering Time	3 sec (max.)
Distance From Thermistor	2 mm (min.)

### Max. Current Derating Curve

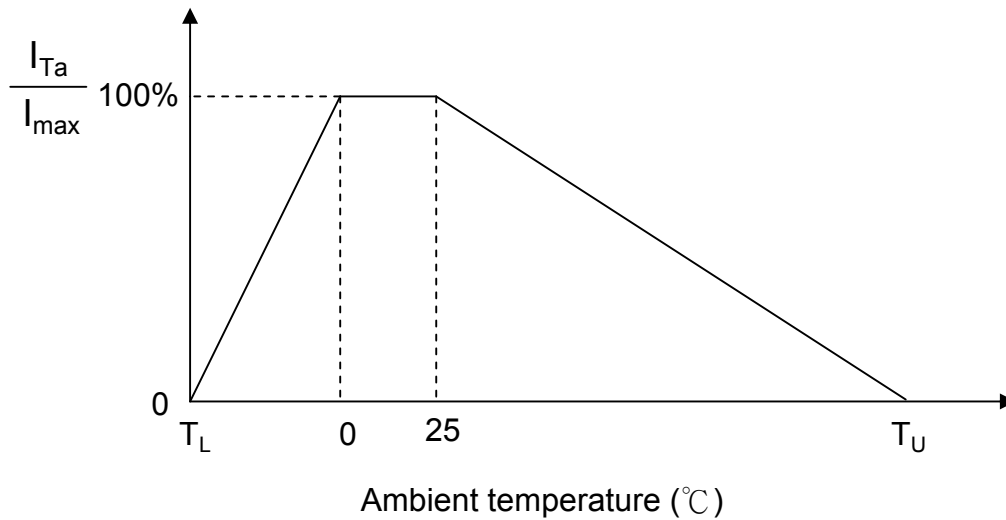

Note:  $T_L$  = Minimum operating temperature ( $^{\circ}\text{C}$ )

$T_U$  = Maximum operating temperature ( $^{\circ}\text{C}$ )

For example :

Ambient temperature( $T_a$ )=55 $^{\circ}\text{C}$

Maximum operating temperature( $T_u$ )= 170 $^{\circ}\text{C}$

$I_{Ta}=[1-(T_a-25)/(T_u-25)]\times I_{max}=79\%I_{max}$ .

### RoHS Compliant Declaration

We hereby declare that the components delivered to your company are compliant with RoHS directive 2011/65/EU.

### Warehouse Storage Conditions of Products

(I) Storage Conditions :

1.Storage Temperature : -10 $^{\circ}\text{C}$  ~+40 $^{\circ}\text{C}$

2.Relative Humidity :  $\leq 75\%RH$

3.Keep away from corrosive atmosphere and sunlight.

(II) Period of Storage : 1 year



---

Safety Approvals (Certified Model/Type : SCK-053)



\* UL 1434 / cUL recognized (File # E138827)



\* CSA recognized (File # 97495)



\* TÜV recognized (File # R 50050155)



\* CQC GB/T 6663.1-2007 recognized (File # CQC05001011993)

\* CQC GB/T 6663.1-2007 recognized (File # CQC05001011989)

Certificates

- (1) TS 16949 certificate
- (2) ISO 9001 certificate


Test Report

- (1) RoHS test report
- (2) Halogen-free test report



R-T Characteristic Curve

**SCK08053LSY**

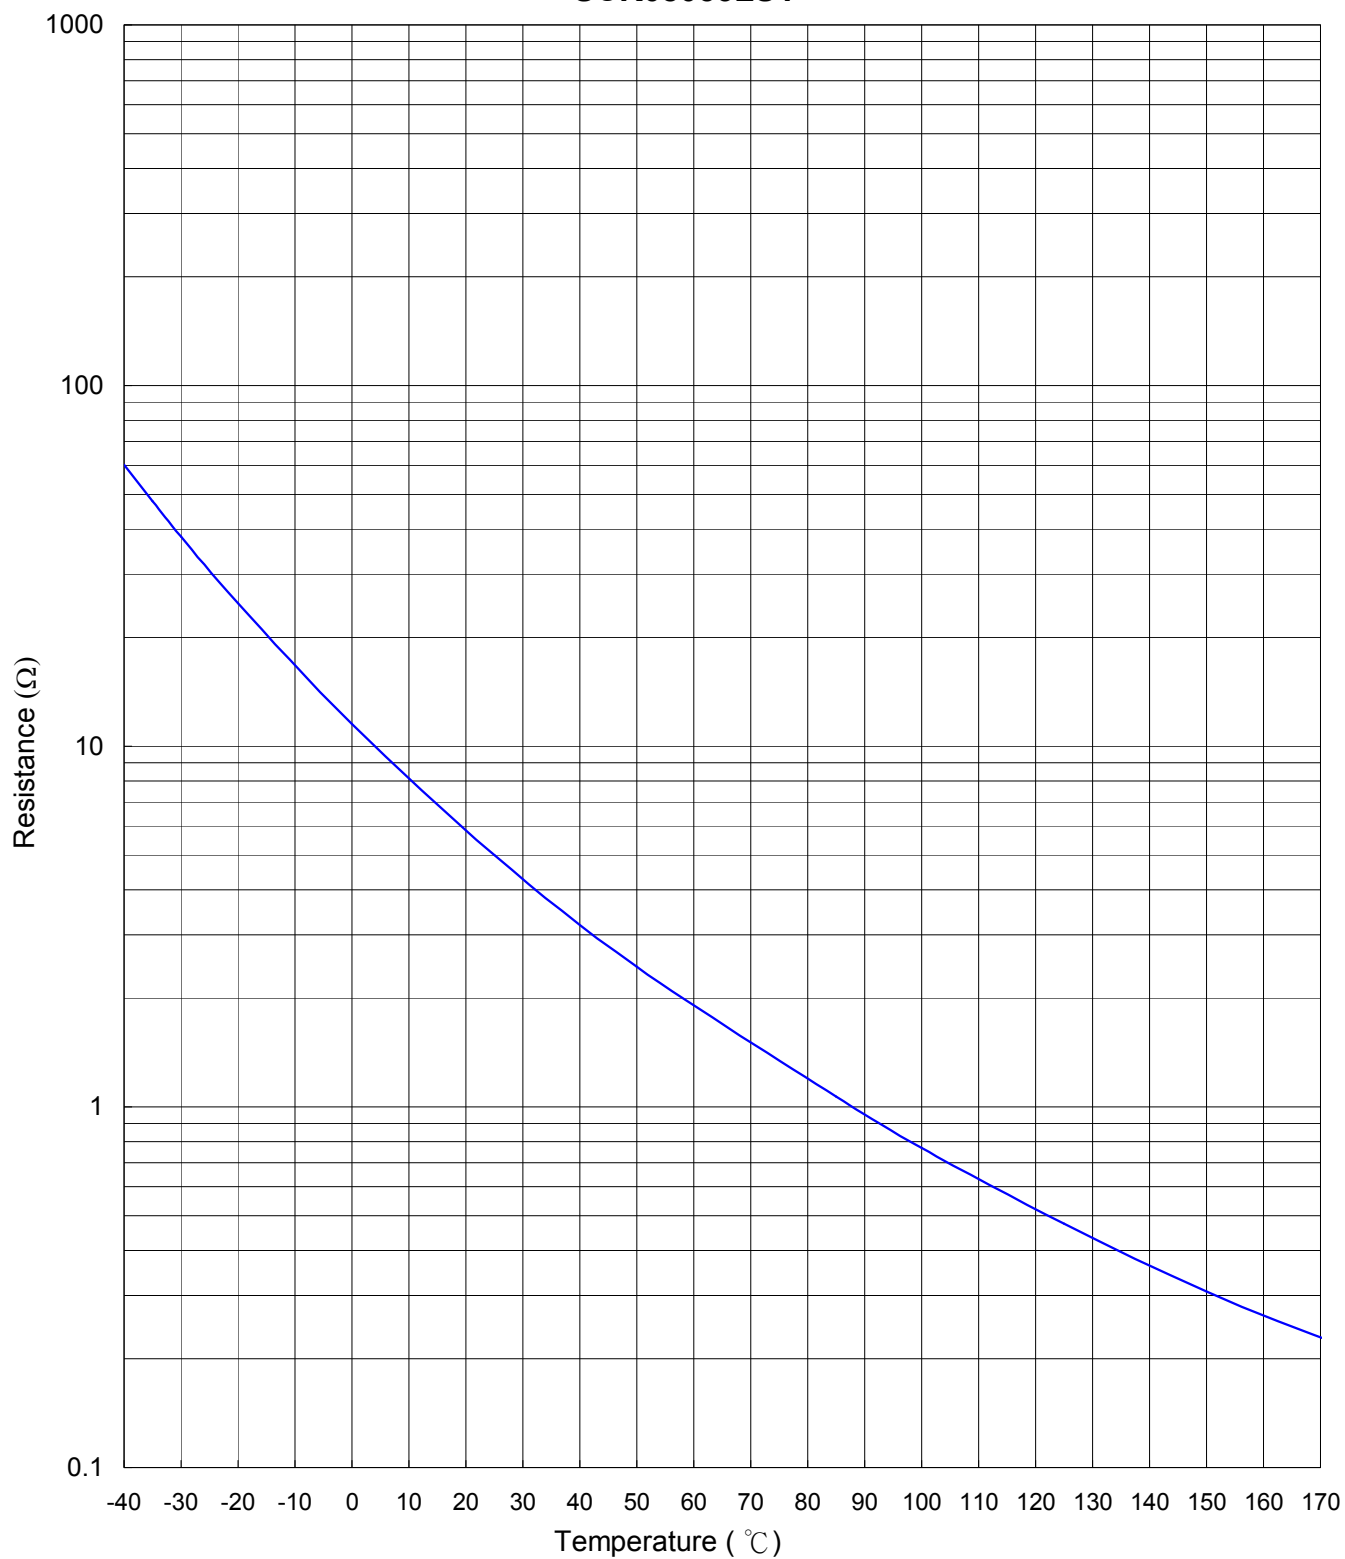

V-I Characteristic Curve (Ambient  $T_a=25\text{ }^\circ\text{C}$ )

**SCK08053LSY**

