



APPROVAL SHEETS

Customer : CODICO/ GMBH

Part No. : 316858

Rev. :

Sample No. : YT-37271

Date of submission : 2025/1/8

Product : PLC Transformer (T3.94/2.24/2.3 SMD)

Please note items listed below does not meet your printed specifications and requires your consent for deviation:

Item	Printed Specification	Proposed Specification

Remark :

This part comply with RoHS requirement.

This part comply with AEC-Q200 requirement.

Operating temperature : -40°C to 125°C

Please evaluate the samples, sign this approval sheet, and return by FAX to ELYTONE

☐ Approved

☐ Disapproved

☐ Conditional Approved

Comment :

Engineer:

Kotting

Verified:

Johnsen

Approved by :

APPROVAL SHEETS

Customer : CODICO/ GMBH

Part No. : 316858

Rev. :





Sample No. : YT-37271

Date of submission : 2025/1/8


Product : PLC Transformer

YT No.	Description of record	Date
YT-35532	New SPEC (YT-35532 alteration)	2023/5/24
YT-37271	Changed inductance specification from 9.0uHMIN to 12.0uH MIN	2023/7/20
YT-37271	Change PartNo to 316858. Increased enamelled wire MW85-C rating. Modified HI-POT specification to 1KVAC,1mA,2Sec. Add inductance & impedance diagram.	2023/10/3
YT-37271	Modified Marking to 316858 and Schematic.	2023/10/31
YT-37271	Added a description of compliance with AEC-Q200 specifications.	2024/8/6
YT-37271	Change case material.	2025/1/8

Mechanical Dimension & Schematic

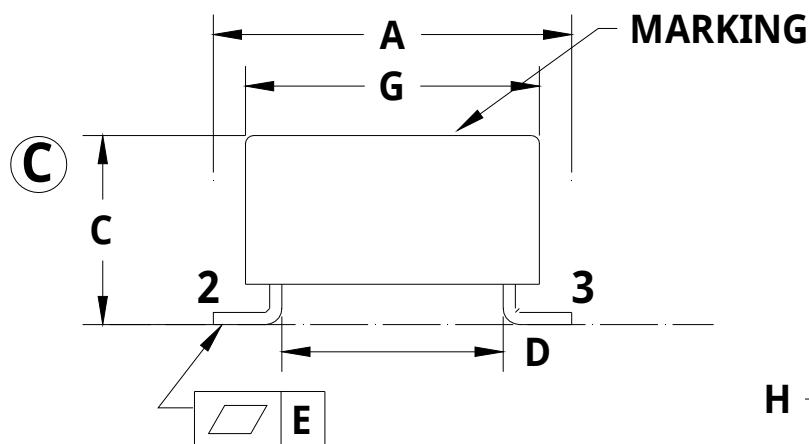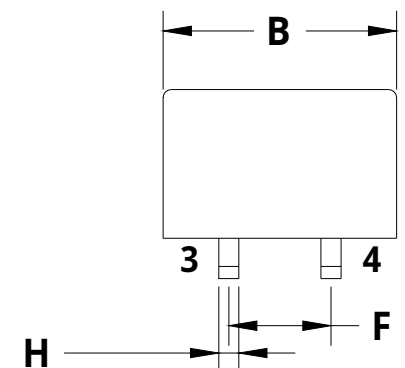
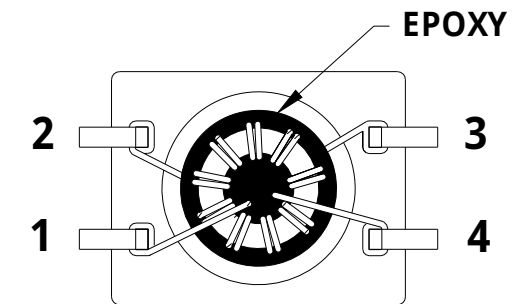


(BOTTOM VIEW) UNIT:mm

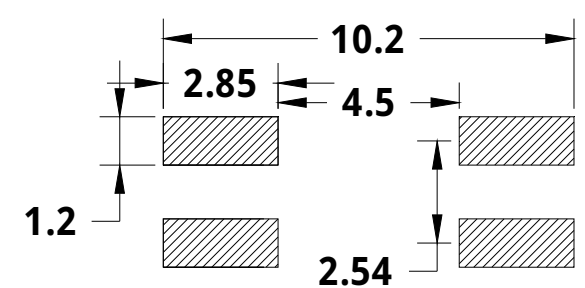

Recommended PCB Layout

Position	Specification
A	9.5 MAX
B	5.88 MAX
C	5.0 MAX
D	5.5±0.2
E	0.1MAX
F	2.54±0.15
G	7.3±0.2
H	0.5x0.3

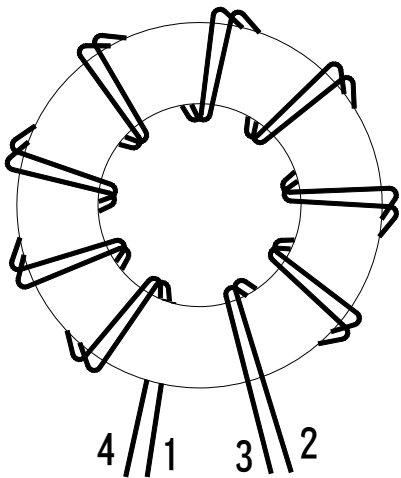Winding Procedure					Winding Direction:			
Step	Winding	Material Reference	Start		Finish		No.of Turns	Remark
			Pin No.	Wire Between	Pin No.	Wire Between		
1	W1	WIRE:AWG#35 180°C MW83C HEAVY R	2		1		9 Ref	Bifilar
	W2	WIRE:AWG#35 180°C MW83C HEAVY N	3		4		9 Ref	
Cross section of winding's construction					Treatment and Assembly:			
					Termination & Soldering : Lead free of solder.			
					Core Assembly : Secure coil on case with epoxy. Marking : Mark the component with a black permanent ink at shown location.			
					Varnish : N/A			
								
Customer : CODICO/ GMBH		Part No. : 316858			Rev.:		Sample No. : YT-37271	

Electrical Requirements :				Remark :									
Testing Item		Specification	Pin No.	Samples tested data									
				1	2	3	4	5	6	7	8	6	20
©	INDUCTANCE @100KHz,0.1V	12uH MIN	2 – 1	16.67	16.06	16.74	16.17	16.29					
		12uH MIN	3 – 4	16.67	16.07	16.74	16.18	16.28					
	INDUCTANCE @2MHz,1V	12uH Ref	2 – 1									16.3	16.8
		12uH Ref	3 – 4									16.4	16.9
	Leakage Inductance @100KHz, 0.1V WK-3260B	100 nH MAX (SHORTED 3,4)	2 – 1	62.69	64.10	62.71	63.89	66.21					
	DC RESISTANCE: 502AC	100 mΩ MAX	2 – 1	74.56	73.98	75.50	74.68	75.60					
		100 mΩ MAX	3 – 4	76.14	76.77	76.03	77.36	77.77					
	Dielectric Strength	1000VAC, 1mA, 2Sec	2 – 3	OK	OK	OK	OK	OK					
Dimension Measurement : (UNIT: mm)				Remark :									
Equipment		Specification	Position	1	2	3	4	5	6	7	8	6	20
micrometer		9.5 MAX	A	8.99	9.02	8.92	8.98	8.97					
Mitutoyo CD-6"B		5.88 MAX	B	5.75	5.75	5.74	5.75	5.72					
	©	5.0 MAX	C	4.51	4.56	4.51	4.57	4.56					
		5.5±0.2	D	5.58	5.62	5.59	5.59	5.64					
		0.1MAX	E	OK	OK	OK	OK	OK					
		2.54±0.15	F	2.49	2.47	2.49	2.47	2.49					
		7.3±0.2	G	7.32	7.30	7.32	7.32	7.32					
		0.5x0.3	H	0.49	0.48	0.48	0.48	0.48					
Customer : CODICO/ GMBH		Part No. : 316858				Rev.:			Sample No. : YT-37271				

Electrical Specification :

1. Inductance : @100KHz , 0.1V
2~1 12uH MIN
3~4 12uH MIN
2. Inductance : @2MHz , 1V
2~1 12uH Ref
3~4 12uH Ref
3. Leakage Inductance : @100KHz , 0.1V
2~1 100nH MAX (Shorted 3,4)
4. DC Resistance
2~1 100 mΩ MAX
3~4 100 mΩ MAX
5. Dielectric Strength
1000Vac , 1mA , 2Sec
6. Rated current 700mA (-40°C ~+125°C)

Customer : CODICO/ GMBH

Part No. : 316858

Rev.:



Sample No. : YT-37271

Taping and packing

Dimensions in mm

Blister tape

Reel

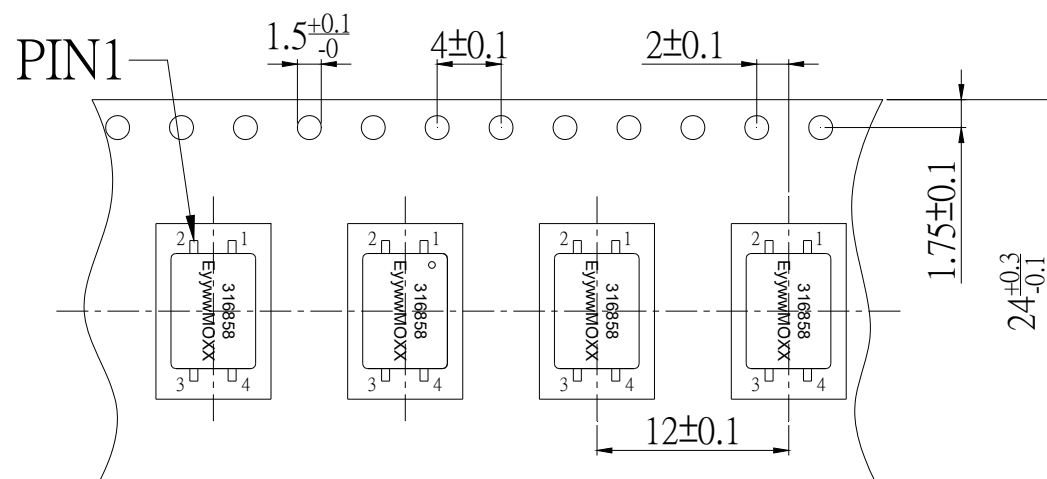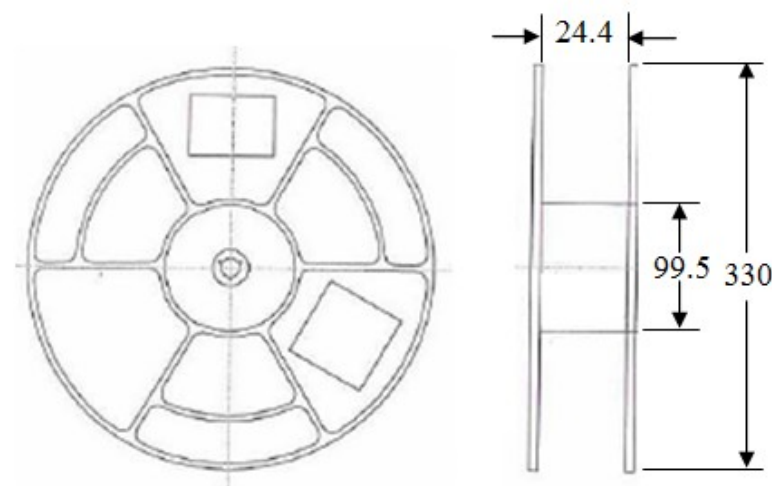

Direction of unreeling



Dimensions in mm

Qty: 1000PCS/REEL , 5000PCS/ Master carton

Customer : CODICO/ GMBH

Part No. : 316858

Rev.:

Sample No. : YT-37271